

DUAL VIEW, LOW CONVEYOR X-RAY SYSTEM FOR SCREENING ULD TYPE FREIGHT AND ISO STANDARD PALLETS

EXPLOSIVES AND NARCOTICS DETECTION ALERT

MATRIXING, NETWORKING AND REMOTE VIEWING


MEETS ALL EUROPEAN COMMISSION AVIATION SCREENING REQUIREMENTS

STANDARD FEATURES

- Full Spectrum Imaging
- View Previous/Next Bag
- Image Archive
- Configurable Image Processing Keys
- Baggage Counter
- Date / Time Display
- Search Indicator
- UPS (Uninterrupted Power Supply)
- Multi Language Support
- Flat Panel Monitor

STANDARD IMAGE PROCESSING FUNCTIONS

- Crystal Clear™
- Black and White
- Organic / Inorganic Stripping
- Inverse Video
- High Penetration
- Pseudo Color
- Low Penetration
- Variable Edge Enhancement
- Variable Color Stripping
- Variable Gamma
- Variable Density
- Dynamic Continuous Zoom & Panning
- Fixed Zoom (64x)

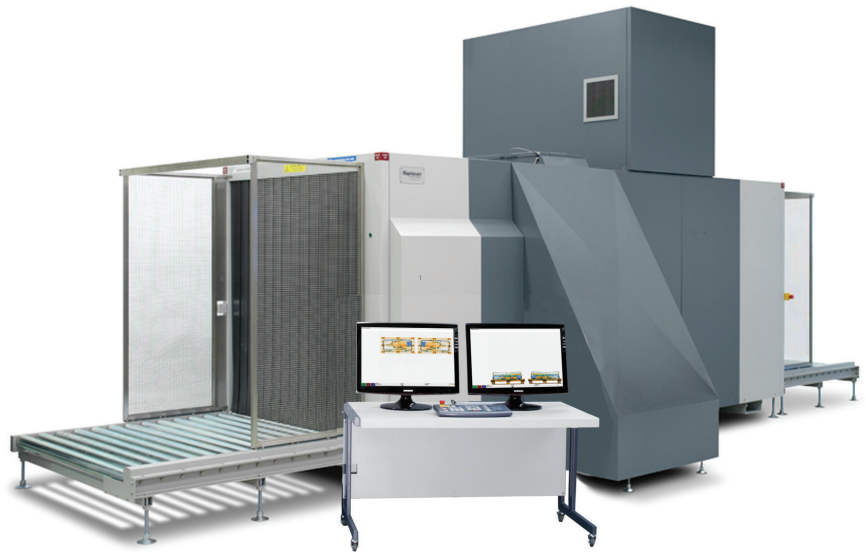

Tunnel Opening (width x height):
1,837 x 1,800 mm (72.3 x 70.9 in)

THE 638DV IS AN ADVANCED DUAL-VIEW X-RAY SYSTEM FOR SCREENING ULD, ISO STANDARD, LOWER DECK AND LARGE CARGO PALLET TYPE FREIGHT. WITH A LARGE AND SPACIOUS TUNNEL SIZE OF 1,837 MM X 1,800 MM AND EXPLOSIVES AND NARCOTICS DETECTION ALERT FEATURE, THE 638DV IS WIDELY USED FOR AIR CARGO SCREENING AND CUSTOMS APPLICATIONS WHERE THROUGHPUT IS MOST IMPORTANT.

The 638DV has been approved and included on the U.S. TSA Air Cargo Screening Technology List (ACSTL) and the Transport Canada (TC) Air Cargo Security Program (ACS).

DETECTION OF EXPLOSIVES AND NARCOTICS ALERT

Target™ and NARCSan™ are designed to assist operators in the detection of a range of explosives and narcotics respectively in real time during the scanning process by marking a potential threat on the X-ray image. Rapiscan detection algorithms are based on regulatory material analysis techniques.

REGULATORY COMPLIANCE

638DV performance is in full compliance with the European Union regulations (EC) No. 300/2008, (EU) No. 2015/1998 and Commissions Decision C (2015)8005 for aviation security.

DUAL VIEW ADVANCED TECHNOLOGY

As mandated by US and EU regulators, the 638DV utilizes a dual-view technology which produces two simultaneous images (vertical and horizontal views) of the scanned object. It provides a more complete image, thereby reducing the need for repositioning and rescanning and enabling rapid, accurate and comprehensive threat detection.

EASE OF USE PROVIDING HIGHEST THROUGHPUT

With over 13 image processing tools and detection alert algorithm functions, the feature rich software allows the operator to more easily and accurately search for contraband.


DARC ALARM

Rapiscan's proprietary detection algorithm that detects areas of high density while screening air cargo. Rapiscan collaborated closely with the U.K. Department for Transport to create DARC alarm and jointly executed the necessary test trials to verify the effectiveness of the DARC Alarm algorithm.



RAPISCAN 638DV

Rapiscan[®]
systems
An OSI Systems Company

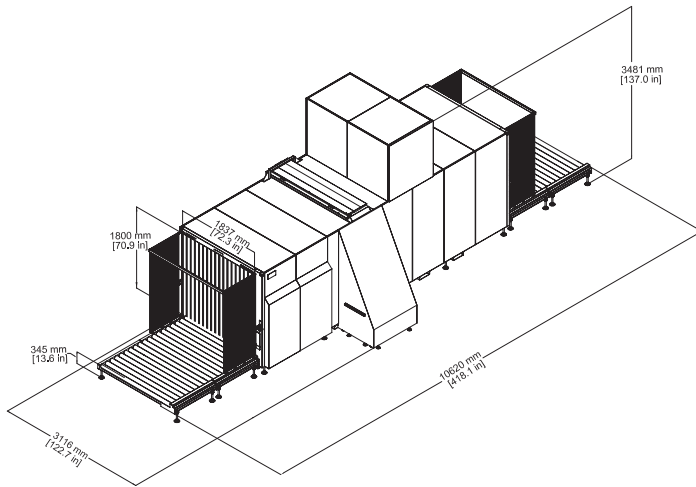

PHYSICAL SPECIFICATIONS

Dimensions:	Length: 10,620 mm (418.1 in.) Width: 3,116 mm (122.7 in.) Height: 3,481 mm (137.0 in.)
Tunnel Size:	1,837 mm (72.3 in.) X 1,800 mm (70.9 in.)
Conveyor Speed:	0.20 m/sec (39.4 ft./min)
Conveyor Load (Max):	3,000 Kg (6,614 lbs) evenly distributed at 230 V 1,500 Kg (3,307 lbs) evenly distributed at 115 V
Conveyor Height:	345 mm (13.6 in.)
Weight (Approx.):	Net: 6,312 Kg (13,915 lbs)
System Power:	115/230 VAC ±10%, 60/50Hz

REGULATORY

- TSA Air Cargo Screening Technology List (ACSTL) Qualified
- Transport Canada (TC) Air Cargo Qualified
- Regulation (EC) No. 300/2008 Compliant
- Regulation (EU) No. 2015/1998 Compliant
- EU Commissions Decision (EU) C(2015)8005 Compliant

X-RAY GENERATOR AND IMAGE PERFORMANCE¹

Steel Penetration:	50 mm typical; 45 mm standard
Wire Resolution:	40 AWG typical; 38 AWG standard
Cooling:	Sealed oil bath with forced air
Anode Voltage:	Operating at 200KV
Tube Current:	1.0 mA
Orientation:	Vertically Downward and Horizontal

OPERATING ENVIRONMENT

Storage Temperature:	-20°C to 50°C
Operating Temperature:	0°C to 40°C
Relative Humidity:	5 to 95% non-condensing

PROTECTION CLASS

System:	IP20
Operator Control Panel:	IP43 ²

HEALTH & SAFETY

Rapiscan[®] Systems' cabinet X-ray products comply with all applicable U.S. FDA and equivalent international regulatory agency requirements, contained in the cabinet X-ray radiation safety performance standard [21 CFR 1020.40] and the general performance standard [21 CFR Part 1010] as well as IEC standard 61010-2-091.

Rapiscan[®] baggage and parcel inspection systems radiation emission leakages are well below the required regulatory limits with less than 1 μSv/hr at 10 cm from all surfaces of cabinet X-ray.

OPTIONS AND ACCESSORIES

- Explosives Detection Alert (Target[™])
- Narcotics Detection Alert (NARCScan[™])
- Density Threshold Alert (DTA)
- Threat Image Projection (TIP)
- Threat Image Projection Network (TIPNet)
- Remote Image Archive Review (NETView[™])
- Network X-ray management automation and link system (NEXLink[™])
- Multi System Network Display Station (NDS)
- Automatic Image Archiving
- Enhanced Image Archiving
- Operator Training Program (OTP)
- Manual Scan
- Foot Mat
- SmartCard Login
- Power Conditioner
- Roller Bed Accessories
- Universal Printer Support

¹ Stated performance as measured by Rapiscan[®] Imaging Validation Test Kit.

² With optional replaceable cover.

With continual development of our products Rapiscan[®] Systems reserves the right to amend specifications without notice. Product pictures are for general reference. Please note that due to US laws and regulations, not all Rapiscan[®] products are available for sale in all countries without restriction. Please contact your Rapiscan[®] Systems sales representative for more information.

AMERICAS, CARIBBEAN

2805 Columbia Street
Torrance,
California
90503
UNITED STATES of AMERICA

Tel: +1 310-978-1457
Fax: +1 310-349-2491

EUROPE, MIDDLE EAST, AFRICA

X-Ray House
Bonehurst Road
Salfords
Surrey RH1 5GG
UNITED KINGDOM

Tel: +44 (0) 870-7774301
Fax: +44 (0) 870-7774302

ASIA

240 Macpherson Road
#07-01 Pines Industrial Building
Singapore
348574
SINGAPORE

Tel: +65-6846-3511
Fax: +65-6743-9915



Certified to
AS9100C



Precedely Right.



Rapiscan Systems is AS9100C:2009 and
ISO 14001:2004 + Cor. 1:2009 Certified

sales@rapiscansystems.com
www.rapiscansystems.com